


ORION-B3501P

350W 2U ATX power supply
with active PFC

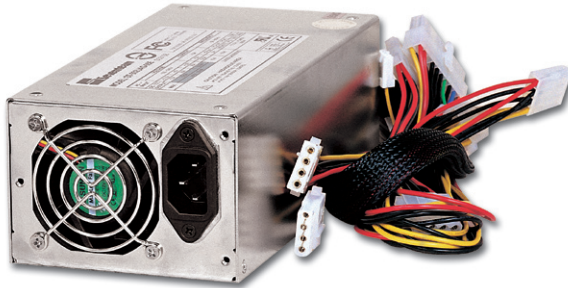

SPECIFICATION

Input Voltage	90V ~ 264V AC, full range
Input Frequency	47 ~ 63 Hz
Input Current	10A@115V, 6A@230V
Efficiency	> 67%
Holdup Time	16 ms at full load
Over Voltage Protection	+5V: 6.5 ~ 7.0V; +3.3V: 4.5V; +12V: 14.5V
Over Power/Load Protection	Output power over 110% ~ 150%
MTBF	100,000 hrs
EMI & Safety Approval	UL, CB, TUV, CE, FCC
Temperature/Humidity	Operating: 0 ~ 40°C, 20 ~ 90%RH Storage: -20 ~ 60°C, 5 ~ 95%RH
Dimension (WxDxH)	200 x 100 x 70 mm; 3.94" x 8.3" x 2.8"

FEATURES

- 2U ATX power supply suitable for 2U and larger chassis
- Active PFC, full-range input
- Support Intel® Pentium® 4 processor
- Max. +5V standby output is 2A
- Max. +12V output is 25A

ORDERING GUIDE

- **ORION-B3501P**
350W 2U ATX power supply with active PFC

DC OUTPUT

	+5V	+3.3V	+12V	-12V	+5Vsb
Max. Load	25A	17A	25A	0.5A	2A
Min. Load	1.0A	1.0A	1.0A	0.25A	0A
Load Reg.	±5%	±5%	±5%	±10%	±5%
Line Reg.	±1%	±1.5%	±0.4%	±0.4%	±1%
Ripple	50mv	50mv	120mv	120mv	50mv
Noise	100mv	100mv	150mv	200mv	100mv