

12.1"

15.1"


Simultaneously Utilizing PCI and PC104 Extension Slot

PPC-1510 and PPC-1211 are the slimmest integrated solutions to fit into extremely tight application for demand expansive function. The products are specially designed for various Kiosk systems, Industrial Control and Automation applications. Such as Public Information, Home Automation, Gaming Machines, ATM, Education, Office and Medical Care Equipments.

They can support high performance socket 370 or NS Geode low power processors, SDRAM memory up to 512MB, built-in one PCI and PC104 expansion slot and 10/100 Base-T Ethernet controller. Three RS-232 and one RS232/422/485 serial ports, support both RCA jack and S terminal, and optional touch screen can enhance advanced features in user interface with multimedia functions.

PPC-1211ET/1201ET

- **LCD Display**
12.1" TFT display, 800 x 600, 262K color
Luminance : 360 cd/m²
Contract ratio: 200:1
Lamp life: min. 30000hr
- **Touch Screen**
Type: Resistive
Software driver: Support DOS, Windows 95/2000/NT 4.0
- **CPU**
PPC-1211 : Support Pentium® III/Celeron® CPU up to 1GMhz
PPC-1201 : On board NS Geode GX1 300MHz
- **Chipset**
PPC-1211 : VIA Apollo Pro 133A, VT82C694X
PPC-1201 : NS Geode CS5530A
- **Memory**
PPC-1211 : Support one 168-pin DIMM, Max. 512 MB
PPC-1201 : On board 64MB SDRAM and one 168-pin DIMM socket
- **HDD**
Support 2.5" HDD x 1
- **FDD/CDD**
Notebook type FDD and 24X CDD built-in (DVD-ROM option)
- **SSD**
Supports Compact Flash Type I/II
- **Network (LAN)**
10/100 Base-T Ethernet
- **Expansion Slots**
One PC/104 and one 32-bit PCI Bus
- **Audio**
VT82C686A, AC97 2.0 compliant
(Mic-in, Line-in, Line-out, CD audio in)
- **Dimension (W x H x D)**
375 x 295 x 85 mm; 14.8" x 11.6" x 3.3"
- **Power Supply**
AC 90-240V 65W universal input
- **I/O Ports**
Serial Ports: Three RS-232 and one RS-232/422/485
Com3/4 supports +5V/+12V
One Parallel, two USB
PS/2 mouse and keyboard

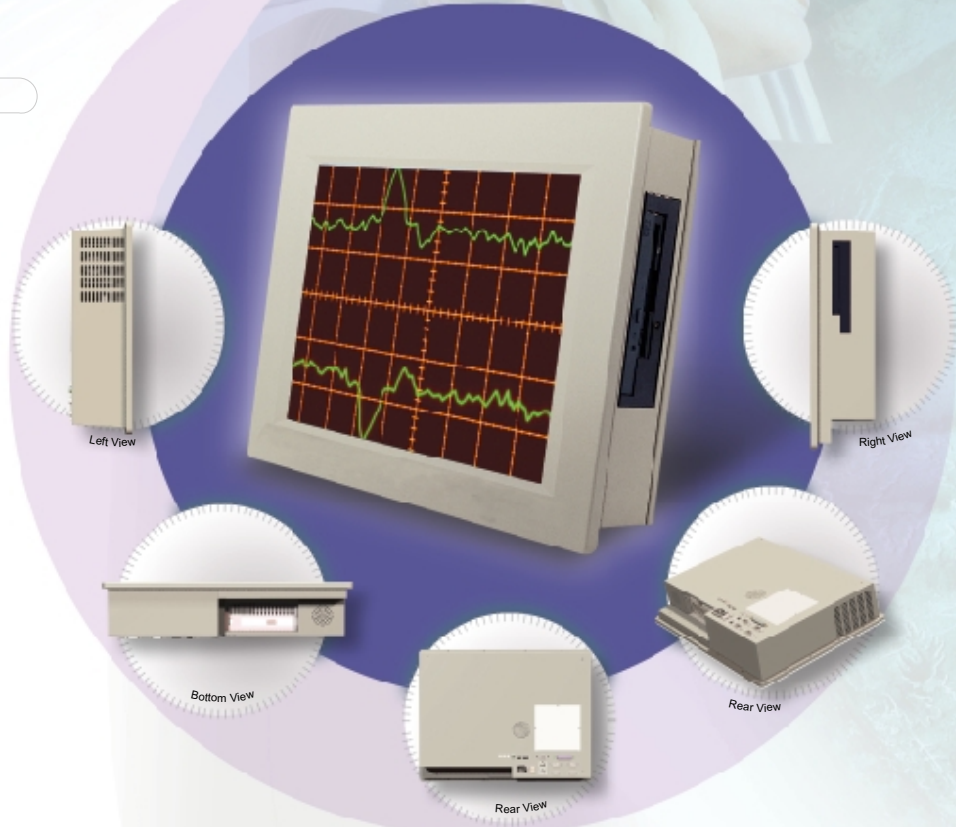

PPC-1510ET/1500ET

- **LCD Display**
15.1" TFT display, 1024 x 768, 262K color
Luminance: 250 cd/m²
Contract ratio: 300:1
Lamp life: min. 30000hr
- **Touch Screen**
Type: Resistive
Software driver: Support DOS, Windows 95/2000/NT 4.0
- **CPU**
PPC-1510 : Support Pentium® III/Celeron® CPU up to 1GMhz
PPC-1500 : On board NS Geode GX1 300MHz
- **Chipset**
PPC-1510 : VIA Apollo Pro 133A, VT82C694X
PPC-1500 : NS Geode CS5530A
- **Memory**
PPC-1510 : Support one 168-pin DIMM, Max. 512 MB
PPC-1500 : On board 64MB SDRAM and one 168-pin DIMM socket
- **HDD**
Support one 3.5" or 2.5" HDD(Standard: 20GB 3.5" HDD)
- **FDD/CDD**
Notebook type FDD and 24X CDD built-in (DVD-ROM option)
- **SSD**
Supports Compact Flash Type I/II
- **Network (LAN)**
10/100 Base-T Ethernet
- **Expansion Slots**
One PC/104 and one 32-bit PCI Bus
- **Audio**
VT82C686A, AC97 2.0 compliant
(Mic-in, Line-in, Line-out, CD audio in)
- **Dimension (W x H x D)**
420 x 310 x 90 mm; 16.5" x 12.2" x 3.5"
- **Mounting**
Wall-mount or Desktop
- **Power Supply**
AC 90-240V 65W universal input
- **I/O Ports**
Serial Ports: Three RS-232 and one RS-232/422/485



**PPC-1211ET**

- > 12.1" TFT display
- > Celeron® 800Mhz CPU
- > 128MB memory
- > 10GB 2.5" HDD
- > With Touch Screen

PPC-1211E

- > 12.1" TFT display
- > Celeron® 800Mhz CPU
- > 128MB memory
- > 10GB 2.5" HDD

PPC-1201ET

- > 12.1" TFT display
- > NS Geode GX1 300MHz CPU
- > 128MB memory
- > 10GB 2.5" HDD
- > With Touch Screen

PPC-1201E

- > 12.1" TFT display
- > NS Geode GX1 300MHz CPU
- > 128MB memory
- > 10GB 2.5" HDD

PPC-1510ET

- > 15.1" TFT display
- > Celeron® 800Mhz CPU
- > 128MB memory
- > 20GB 3.5" HDD
- > With Touch Screen

PPC-1510E

- > 15.1" TFT display
- > Celeron® 800Mhz CPU
- > 128MB memory
- > 20GB 3.5" HDD

PPC-1500ET

- > 15.1" TFT display
- > NS Geode GX1 300MHz CPU
- > 128MB memory
- > 20GB 3.5" HDD
- > With Touch Screen

PPC-1500E

- > 15.1" TFT display
- > NS Geode GX1 300MHz CPU
- > 128MB memory
- > 20GB 3.5" HDD

**Portwell, Inc**

3F, No. 92, Nei-Hu Rd., Sec. 1,
114 Taipei, Taiwan, R.O.C.
Tel: +886-2-27992020
Fax: +886-2-27991010
E-mail: info@mail.portwell.com.tw
<http://www.portwell.com.tw>

American Portwell Technology, Inc.

38507 Cherry St. Suite D,
Newark, CA 94560 USA
Tel: 510-790-9192
Fax: 510-790-9191
E-mail: info@mail.portwell.com
<http://www.portwell.com>

Portwell Japan, Inc.

☎E101-0042 Ueda Build. 7F, 10-2
Kanda higashi matsushita-cho
chiyoda-ku Tokyo Japan
Tel: +81-3-5298-8071
Fax: +81-3-5298-8072
E-mail: sales@portwell.co.jp
<http://www.portwell.co.jp>